

Network cabinet (YX-003)

Features

- ◇ The frame is made of nine folds structure.
- ◇ High density vented front & rear double doors, Lockable door and sidepanels for
- ◇ Fully adjustable vertical mounting rails
- ◇ Swiveling wheels and legs can be jointly installed to withstand up to 800kgmax
- ◇ Several lockable wiring holes on top/bottom, size of the large hole at the bottom adjustable
- ◇ Optional accessories.

Youxin



www.youfibercable.com

Standard:

- ◇ Comply with ANSI/EIA RS-310-D, IEC297-2, DIN41494; PART1, DIN41494; PART7, ETSI standard

Material:

- ◇ High grade cold rolled steel.

Thickness:

- ◇ Mounting profile: 2.00mm others: 1.2--1.5mm

Surface finish:

- ◇ Degrease, acid pickling, rust prevention and parkerizing, pure water cleaning, static electricity plastic painting.

Body Color:

- ◇ RAL7035, RAL7044, RAL9004 etc.


Description

Material: SPCC quality cold rolled steel Thickness: Square hole strips 2.0mm, others 1.2mm
color: RAL9004, RAL7044

Surface finish: Degrease, acid pickling, rust prevention and parkerizing, pure water cleaning, static electricity plastic painting

Network cabinet (YX-003)

www.youfibercable.com

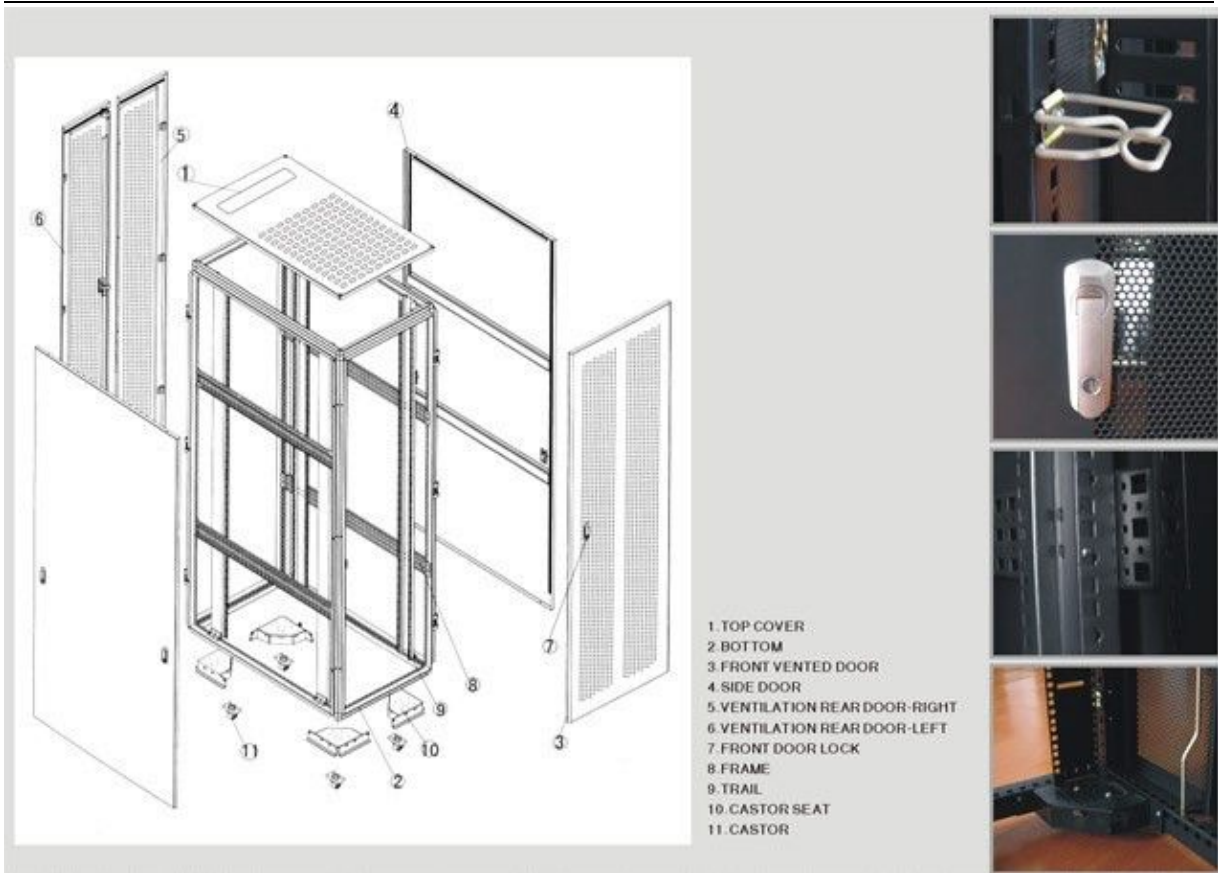

- 1. TOP COVER
- 2. BOTTOM
- 3. FRONT VENTED DOOR
- 4. SIDE DOOR
- 5. VENTILATION REAR DOOR-RIGHT
- 6. VENTILATION REAR DOOR-LEFT
- 7. FRONT DOOR LOCK
- 8. FRAME
- 9. TRAIL
- 10. CASTOR SEAT
- 11. CASTOR

Specification

| MODEL NO. | CAPACITY | WIDTH(MM) | DEPTH(MM) | HEIGHT(MM) | PACKING DIMENSION | | |
|-------------|----------|-----------|-----------|------------|-------------------|------|------|
| | | | | | W/M | D/M | H/M |
| YX-003-6618 | 18U | 600 | 600 | 988 | 0.62 | 0.62 | 1.01 |
| YX-003-6818 | | 600 | 800 | | 0.62 | 0.82 | 1.01 |
| YX-003-6018 | | 600 | 1000 | | 0.62 | 1.02 | 1.01 |
| YX-003-6622 | 22U | 600 | 600 | 1166 | 0.62 | 0.62 | 1.19 |
| YX-003-6822 | | 600 | 800 | | 0.62 | 0.82 | 1.19 |
| YX-003-6022 | | 600 | 1000 | | 0.62 | 1.02 | 1.19 |
| YX-003-6627 | 27U | 600 | 600 | 1388 | 0.62 | 0.62 | 1.41 |
| YX-003-6827 | | 600 | 800 | | 0.62 | 0.82 | 1.41 |
| YX-003-6027 | | 600 | 1000 | | 0.62 | 1.02 | 1.41 |
| YX-003-6632 | 32U | 600 | 600 | 1610 | 0.62 | 0.62 | 1.63 |
| YX-003-6832 | | 600 | 800 | | 0.62 | 0.82 | 1.63 |
| YX-003-6032 | | 600 | 1000 | | 0.62 | 1.02 | 1.63 |
| YX-003-6637 | 37U | 600 | 600 | 1833 | 0.62 | 0.62 | 1.86 |

Network cabinet (YX-003)

www.youfibercable.com

| | | | | | | | |
|-------------|-----|-----|------|------|------|------|------|
| YX-003-6837 | | 600 | 800 | | 0.62 | 0.82 | 1.86 |
| YX-003-6037 | | 600 | 1000 | | 0.62 | 1.02 | 1.86 |
| YX-003-8837 | | 800 | 800 | | 0.82 | 0.82 | 1.86 |
| YX-003-8037 | | 800 | 1000 | | 0.82 | 1.02 | 1.86 |
| YX-003-6642 | 42U | 600 | 600 | 2055 | 0.62 | 0.62 | 2.08 |
| YX-003-6842 | | 600 | 800 | | 0.62 | 0.82 | 2.08 |
| YX-003-6042 | | 600 | 1000 | | 0.62 | 1.02 | 2.08 |
| YX-003-8842 | | 800 | 800 | | 0.82 | 0.82 | 2.08 |
| YX-003-8042 | | 800 | 1000 | | 0.82 | 1.02 | 2.08 |
| YX-003-6645 | 45U | 600 | 600 | 2188 | 0.62 | 0.62 | 2.21 |
| YX-003-6845 | | 600 | 800 | | 0.62 | 0.82 | 2.21 |
| YX-003-6045 | | 600 | 1000 | | 0.62 | 1.02 | 2.21 |
| YX-003-8845 | | 800 | 800 | | 0.82 | 0.82 | 2.21 |
| YX-003-8045 | | 800 | 1000 | | 0.82 | 1.02 | 2.21 |
| YX-003-6647 | 47U | 600 | 600 | 2277 | 0.62 | 0.62 | 2.3 |
| YX-003-6847 | | 600 | 800 | | 0.62 | 0.82 | 2.3 |
| YX-003-6047 | | 600 | 1000 | | 0.62 | 1.02 | 2.3 |
| YX-003-8847 | | 800 | 800 | | 0.82 | 0.82 | 2.3 |
| YX-003-8047 | | 800 | 1000 | | 0.82 | 1.02 | 2.3 |

Applications